

# زكاة التبع العجايب والبعث العليمي



## جامعة الانبار كلية علوم الحاسوب وتكنولوجيا المعلومات قسم علوم الحاسبات

Department	علوم الحاسبات	القسم:
Subject Name:	Logic Design	أسم المادة :
Year of Study:	2025-2024	السنة الدراسية:
Course:	الكورس الاول	الكورس:
Title and No of lecture:	Lecture 3:Digital Number System II	عنوان ورقم المحاضرة:
Instructor Name:	د. مصطفى معد حمدي	أسم التدريسي:

السنة : 2025-2024

اسم المادة: التصميم المنطقي


أستاذ المادة: د. مصطفى معد حمدي

# LECTURE THREE

## DIGITAL NUMBER SYSTEMS II

### 3. Convert a number from one number system to another

#### Conversion between number bases:

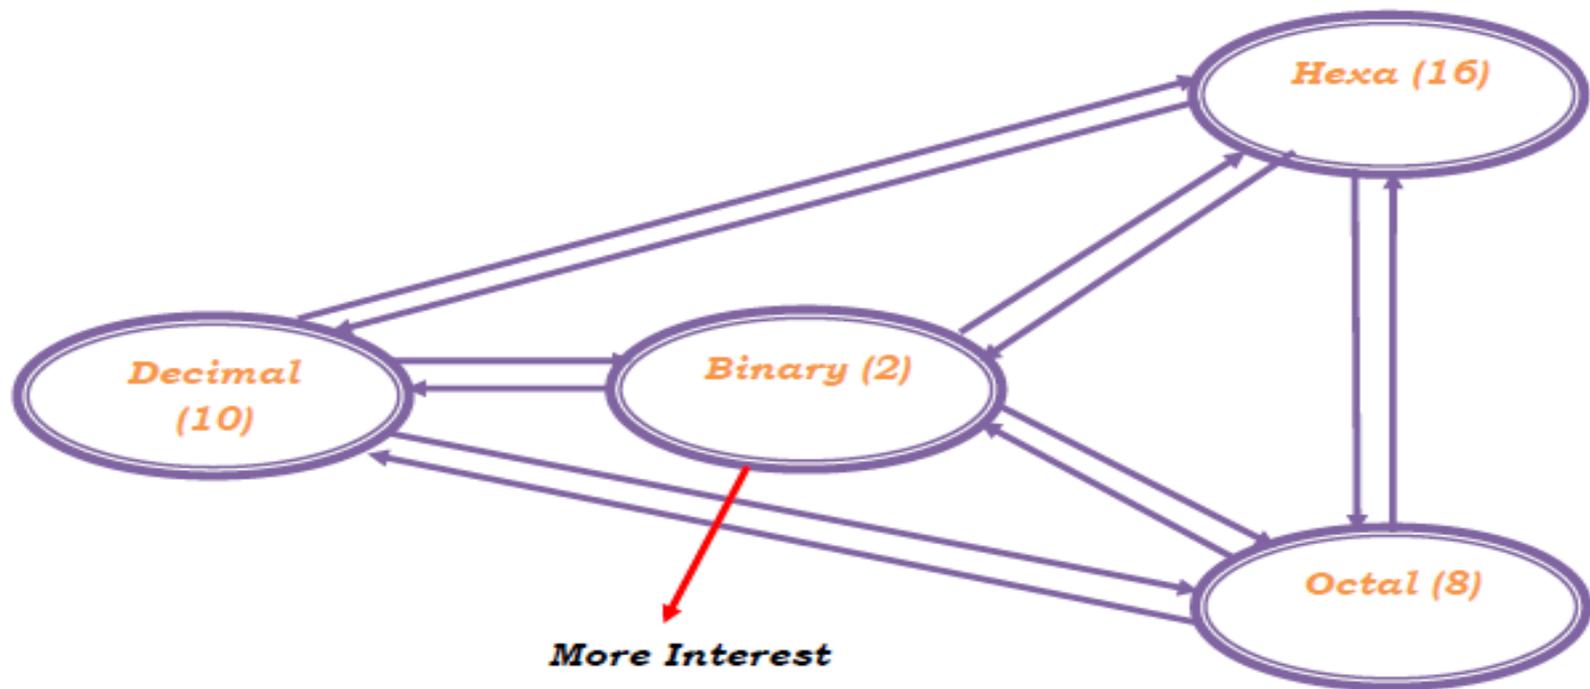

# Why We need Conversion

- ✓ We need decimal system for *real world* (for presentation and input): for example: we use 10-based numbering system for input and output in digital calculator.
- ✓ We need binary system inside calculator for *calculation*.



**a) Binary to decimal conversions:**

- ✓ **Rule:** any binary number can be converted to its decimal equivalent simply by *summing together the weights of the various positions in the binary number which contains a 1.*

**Example 1: Convert  $11011_2$  to its decimal equivalent**

$$\begin{array}{ccccccccc} 1 & & 1 & & 0 & & 1 & & 1 \\ \downarrow & + & \downarrow & + & \downarrow & + & \downarrow & & \downarrow & = & 16+8+2+1= & 27_{10} \\ 2^4 & & +2^3 & & 0 & & 2^1 & & 2^0 & & & \end{array}$$

**Example 2: Convert  $10110101_2$  to decimal equivalent**

$$2^7 + 0 + 2^5 + 2^4 + 0 + 2^2 + 0 + 2^0 = 181_{10}$$

**b) Decimal to binary conversions:**

- ✓ There are two ways to convert a decimal number to its equivalent binary representation
  1. *The reverse of the binary-to-decimal conversion process (optional). The decimal number is simply expressed as a sum of powers of 2 and then  $1_2$  and  $0_2$  are written in the appropriate bit positions.*

### Example 1:-Convert $45_{10}$ to binary number

$$45_{10} = 32 + 8 + 4 + 1 = 2^5 + 0 + 2^3 + 2^2 + 0 + 2^0 = 101101_{(2)}$$

### Example 2:-Convert $76_{10}$ to binary number

$$76_{10} = 64 + 8 + 4 = 2^6 + 2^3 + 2^2 = 1001100_2$$

- 2. Repeated division: Repeating division the decimal number by 2 and writing down the remainder after each division until a quotient of 0 is obtained.*

#### **Note:**

**The binary result is obtained by writing the first remainder as the LSB and the last remainder as the MSB.**

#### General Rule 1: Conversion from decimal to other base

1. Divide decimal number by the base (2, 8, 16, ...).
2. The remainder is the lowest-order digit.
3. Repeat first two steps until no divisor remains.

## General Rule 2: Decimal fraction conversion to another base

1. Multiply decimal number by the base (2, 8, ...).
2. The integer is the highest-order digit.
3. Repeat first two steps until fraction becomes zero.

### Example 1 Convert $25_{10}$ to binary number

$$\begin{array}{l} \frac{25}{2} = 12 + \text{remainder of } 1 \text{ (LSB)} \\ \frac{12}{2} = 6 + \text{remainder of } 0 \\ \frac{6}{2} = 3 + \text{remainder of } 0 \\ \frac{3}{2} = 1 + \text{remainder of } 1 \\ \frac{1}{2} = 0 + \text{remainder of } 1 \text{ (MSB)} \end{array}$$

$25_{10} = 11001_2$

## Example 2 Convert $13_{10}$ to binary number

Division by 2		Quotient integer	remainder
$\frac{13}{2}$	<b>==</b>	6	1 ( $a_0$ )
$\frac{6}{2}$		3	0 ( $a_1$ )
$\frac{3}{2}$		1	1 ( $a_2$ )
$\frac{1}{2}$		0	1 ( $a_3$ )
<b>Answer</b>		<b><math>(13)_{10} = (a_3 a_2 a_1 a_0) = (1101)_2</math></b>	

### Example 3: Convert $0.625_{10}$ to binary number

Multiply by 2	Integer		Fraction	coefficient
$0.625 * 2 =$	1	+	0.25	$a_1 = 1$
$0.250 * 2 =$	0	+	0.50	$a_2 = 0$
$0.500 * 2 =$	1	+	0(stop)	$a_3 = 1$

Correct  
order

**Answer**  $(0.625)_{10} = (0.a_1 a_2 a_3)_2 = (0.101)_2$

#### c) Octal-to-decimal

✓ To convert, we need to *multiply each octal digit by its positional weight.*

#### Example 1

$$372_{(8)} = (3 * 8^2) + (7 * 8^1) + (2 * 8^0) = (3 * 64) + 56 + 2 = 250_{10}$$

## Example 2

$$24.6_8 = (2 \cdot 8^1) + (4 \cdot 8^0) + (6 \cdot 8^{-1}) = 20.75_{10}$$

d) Decimal to octal

✓ Repeated division by 8.

**Example 1: Convert  $266_{10}$  to octal number.**

$$\begin{array}{l} \frac{266}{8} = 33 + \text{remainder of } 2 \text{ (LSD)} \\ \frac{33}{8} = 4 + \text{remainder of } 1 \\ \frac{4}{8} = 0 + \text{remainder of } 4 \end{array}$$

$$266_{10} = 412_{(8)}$$

**Example 2: Convert  $0.35_{10}$  to octal number.**

	Multiply by 8	Integer		Fraction	coefficient	
	$0.35 * 8 =$	2	+	0.80	$a_1 = 2$	
Repeated "stop"	$0.8 * 8 =$	6	+	0.40	$a_2 = 6$	
	$0.4 * 8 =$	3	+	0.20	$a_3 = 3$	
	$0.2 * 8 =$	1	+	0.60	$a_4 = 1$	
	$0.6 * 8 =$	4	+	0.80	$a_5 = 4$	
	<b>Answer</b>	$(0.35)_{10} = (0.a_1 a_2 a_3 a_4 a_5)_2 = (0.26314)_8$				

e) Hexa-to-decimal

**Example 1:-Convert  $356_{(16)}$  to decimal:**

$$356_{(16)} =$$

$$(3 * 16^2) + (5 * 16^1) + (6 * 16^0) = 3 * 256 + 80 + 6 = 854_{(10)}$$

**Example 2:-Convert  $2AF_{(16)}$  to decimal:**

$$2AF_{(16)} =$$

$$(2 \cdot 16^2) + (10 \cdot 16^1) + (15 \cdot 16^0) = 512 + 160 + 15 = 687_{(10)}$$

**f) Decimal-to-hexa:(using repeated division by 16)**

**Example 1: Convert  $423_{10}$  to hex number.**

$$\frac{423}{16} = 26 + \text{remainder of } 7 \text{ (LSD)}$$

$$\frac{26}{16} = 1 + \text{remainder of } 10$$

$$\frac{1}{16} = 0 + \text{remainder of } 1$$

$$423_{10} = 1A7_{(16)}$$

***g) Hexa-to-binary:***

✓ Each hexa digit is converted to its *four-bit binary equivalent*:

**Example 1: Convert  $9F2_{(16)}$  to its binary equivalent**

<b>9</b>	<b>F</b>	<b>2</b>
↓	↓	↓
<b>1001</b>	<b>1111</b>	<b>0010</b>

**$9F2_{(16)} = 100111110010_{(2)}$**

**Example 2: Convert  $BA6_{(16)}$  to binary equivalent**

**$BA6_{(16)} = (\underline{1011} \ \underline{1010} \ \underline{0110})_2$**



i) Octal to binary conversion:

✓ Conversion each octal digit to its *three bit binary equivalent*.

Conversion Table								
Octal digit	0	1	2	3	4	5	6	7
Binary equivalent	000	001	010	011	100	101	110	111

✓ Using this table, we can convert any octal number to binary by individually converting each digit.

**Example 1: Convert  $472_{(8)}$  to binary number**

**Solution:**

4      7      2  
↓      ↓      ↓  
100    111    010

$$472_{(8)} = 100111010_{(2)}$$

**Example 2: Convert  $5431_{(8)}$  to binary number**

**Solution:**


$$\underline{5431}_{(8)} = \underline{101} \ \underline{100} \ \underline{011} \ \underline{001} = 101100011001_{(2)}$$

**j) Binary to octal conversion:**

- ✓ The bits of the binary number are grouped into group of 3 bits starting at the LSB, then each group is converted to its octal equivalent (see table).

**Example 1: Convert  $11010110_{(2)}$  to octal equivalent**

**Solution:**

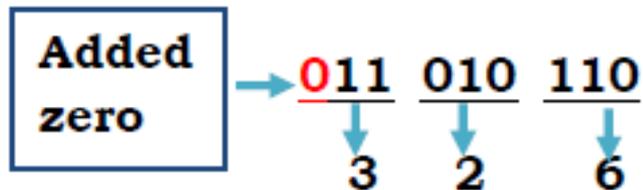

$$11010110_{(2)} = 326_{(8)}$$

**Note:**

Zero was placed to the left of the MSB to produce groups of 3 bits.

**General example:**

**Convert  $177_{10}$  to its eight-bit binary equivalent by first converting to octal.**

## Solution:

$$\begin{array}{l} \frac{177}{8} = 22 + \text{remainder of } 1 \text{ (LSD)} \\ \frac{22}{8} = 2 + \text{remainder of } 6 \\ \frac{2}{8} = 0 + \text{remainder of } 2 \end{array}$$

$177_{10} = 261_{(8)}$

- ✓ Thus  $177_{10} = 261_{(8)}$ , now we can quickly convert this octal number to its binary equivalent **010110001** to get eight bit representation.

So:

$$177_{10} = 1011000_{(2)}$$

***Important Note:*** this method of decimal-to-octal-to-binary conversion is often quicker than going directly from decimal to binary, especially for large numbers.

#### **4. Advantage of octal and hexadecimal systems:**

1. Hexa and octal number are used as a "*short hand*" way to represent strings of bits.
2. Error prone to write the binary number, in hex and octal *less error*.
3. The octal and hexadecimal number systems are both used (*in memory addressing and microprocessor technology*).